

Nader

Nader

Shanghai Liangxin Electrical Co., LTD.

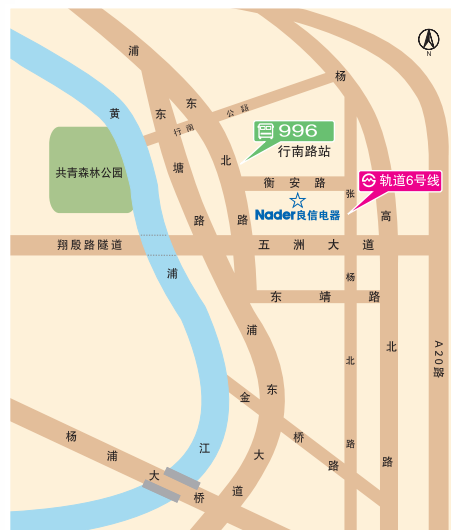
Add: No. 668, Heng' an Road, Pudong, Shanghai, 200137

Tel: +86-21-68596699

Fax: +86-21-23025796

Email: liangxin@sh-liangxin.com

www.sh-liangxin.com



As standards, specifications and designs change from time to time, please ask for confirmation of the information given in this publication.



NDM5-160 Series Molded Case Circuit Breaker

2013 - Liangxin Electrical - All rights reserved

Nader

Specialist of Low-voltage Electrical Components

About us



SHANGHAI LIANGXIN ELECTRICAL CO.,LTD.

Nader is a private joint-stock enterprise that is set up by experts in this industry, with the headquarter locates in Pudong new area, Shanghai, China. We supply products with the best cost performance based on the business ideas of "Concentration and innovation" , the core value of "Sincerity and care" and the business mission of "To be the top-ranking supplier of LV devices by using resources efficiently" .

We have passed the three-in-one system certification including ISO 9001-2008, ISO 14001-2004 and IECQ QC 080000, and our series of LV components have passed CCC, CB, CE (Conformity of Europe, TÜV, Din, UL and C-UL certification in succession. We comply with the European RoHS directive actively, so out products have passed inspection of SGS-CSTC as the first company in China LV device industry. Our main products have been winning Shanghai Electrical Brand Name Products for continuous three years. In addition, our products have passed the selective examination performed by the nation and Shanghai for continuous three years.

Now we have established our regional sales & service centers in 37 large cities (Shanghai, Beijing, Guangzhou, Shenzhen, Nanjing, Hangzhou, Wuhan, Chongqing, Tianjin, Xi' an, Jinan, Dalian, Harbin, Changsha, Kunming, Zhengzhou, Chengdu, Nanchang, Shijiazhuang, Changchun and Guiyang, etc.) for providing in time and good service for our customers across the country.



NDM5-160 Series

Molded Case Circuit
Breaker

Catalog

NDM5-160	3	Tripping characteristics	14
Scope of application	3	Overall and mounting dimension	16
Model and implication	3	Mounting modes	18
Main technical parameters	5	Package and storage	18
Normal operating environment	5	Accessories and installation	18
Tripping characteristics	6	Notice	18
Overall and mounting dimension	9		
Mounting modes	10	NDM5E-160	19
Package and storage	10	Scope of application	19
Accessories and installation	10	Model and implication	19
Notice	10	Main technical parameters	21
		Normal operating environment	22
NDM5Z-160	11	Tripping characteristics	23
Scope of application	11	Overall and mounting dimension	26
Model and implication	11	Mounting modes	26
Main technical parameters	13	Package and storage	26
Normal operating environment	13	Accessories and installation	26

NDM5-160 Molded case circuit breaker

Scope of application

- > The NDM5-160 series of molded case circuit breakers (MCCBs) with the rated insulation voltage of 800V are applicable to the AC 50Hz or 60Hz circuits with the rated operating voltage of AC230V, AC400V and AC690V, and the rated operating current of 16A~160A for electrical energy distribution, as well as protection of circuits and power supply devices in case of overload, short circuit, undervoltage (With the UVT);, the products are also used to protect motors during infrequent starting, braking, overload, short circuit, etc..
- > The isolating function with the relative symbol: . ————⏏————
- > Standards: IEC60947-2 and GB14048.2.



Model and implication

ND	M	5	-	160	□	□	/	□	/	□	/	□	□	□	□
1	2	3	4	5	6	7	8	9	10	11	12				

No.	Implication	Model
1	Enterprise code "NADER"	ND
2	Molded case circuit breaker	N
3	Design code	5
4	Frame current Inm (A):	160
5	Breaking level code:	S, H, L
6	Rated current In (A):	16, 20, 25, 32, 40, 50, 63, 80, 100, 125, 160
7	Number of poles	(Refer to "Note a")
8	Release code	(Refer to "Note b")
9	Installation modes	(Refer to "Note c")
10	Connection modes	(Refer to "Note d")
11	Operating modes	(Refer to "Note e")
12	Accessories	(Refer to "Table 1")

Note:

- a) Number of poles
- > 2: 2 poles; 3: 3 poles; 4: 4 poles;
 - > 4A: There is no overcurrent protection on Pole N, and Pole N is always on;
 - > 4B: There is no overcurrent protection on Pole N, and Pole N opens and closes with the other three poles (Pole N closes at first, and opens at last);
 - > 4C: There is overcurrent protection on Pole N, and Pole N opens with the other three poles (Pole N closes at first, and opens at last);
 - > 4D: There is overcurrent protection on Pole N, and Pole N is always on.
- b) Release code
- TMD (Distribution protection): [Thermal adjustable (0.8-0.9-1.0) In, magnetic adjustable (5-6-7-8-9-10) In, for power distribution];
- TMM (Motor protection): [Thermal adjustable (0.8-0.9-1.0) In, magnetic adjustable (8-9-10-11-12-13-14) In, for motors];
- Note: The magnetic adjustment scope of TMM (Motor protection) is (10-11-12-13-14) In.
- c) Installation modes: Fixed: "No code" ; plug-in: "P" ; guide rail: "G" .
- d) Connection modes: Front wiring: "No code" ; front extension wiring: "ES" ; front bare copper cable wiring: "FCu" ; rear screw wiring: "R" .
- e) Operating modes: Direct handle operation: "No code" ; rotary handle operation: "R" ; motor operation: "M" (Note: Not applicable to 2P).

Table 1

Accessory code	Name of accessory	Mounting position																		
		2P	3P	4P																
00	No	—	—	—																
10	Alarm contact	<table><tr><td></td><td>⋮</td></tr><tr><td></td><td></td></tr></table>		⋮			<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮			<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮						
	⋮																			
○	⋮																			
○	⋮																			
20	Shunt release	<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮			<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮			<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮						
○	⋮																			
○	⋮																			
○	⋮																			
30	Undervoltage release	<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮			<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮			<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td></td></tr></table>	○	⋮						
○	⋮																			
○	⋮																			
○	⋮																			
40	Single auxiliary contact	—	<table><tr><td></td><td>⋮</td></tr><tr><td></td><td>○</td></tr></table>		⋮		○	<table><tr><td></td><td>⋮</td></tr><tr><td></td><td>○</td></tr></table>		⋮		○								
	⋮																			
	○																			
	⋮																			
	○																			
50	Double auxiliary contacts	—	<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td></td><td></td></tr></table>		○	⋮	○					<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td></td><td></td></tr></table>		○	⋮	○				
	○	⋮	○																	
	○	⋮	○																	
60	Three auxiliary contacts	—	<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td>○</td><td></td></tr></table>		○	⋮	○			○		<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td>○</td><td></td></tr></table>		○	⋮	○			○	
	○	⋮	○																	
		○																		
	○	⋮	○																	
		○																		
12	Alarm contact + shunt release	<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td></td></tr></table>	○	⋮	○		<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td></td></tr></table>	○	⋮	○		<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td></td></tr></table>	○	⋮	○					
○	⋮																			
○																				
○	⋮																			
○																				
○	⋮																			
○																				
13	Alarm contact + undervoltage release	<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td></td></tr></table>	○	⋮	○		<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td></td></tr></table>	○	⋮	○		<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td></td></tr></table>	○	⋮	○					
○	⋮																			
○																				
○	⋮																			
○																				
○	⋮																			
○																				
14	Alarm contact + single auxiliary contact	—	<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td>○</td></tr></table>	○	⋮		○	<table><tr><td>○</td><td>⋮</td></tr><tr><td></td><td>○</td></tr></table>	○	⋮		○								
○	⋮																			
	○																			
○	⋮																			
	○																			
15	Alarm contact + double auxiliary contacts	—	<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td></td><td></td></tr></table>	○	○	⋮	○					<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td></td><td></td></tr></table>	○	○	⋮	○				
○	○	⋮	○																	
○	○	⋮	○																	
16	Alarm contact + three auxiliary contacts	—	<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td>○</td><td></td></tr></table>	○	○	⋮	○			○		<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td></td><td></td><td>○</td><td></td></tr></table>	○	○	⋮	○			○	
○	○	⋮	○																	
		○																		
○	○	⋮	○																	
		○																		
70	Alarm contact + shunt release + single auxiliary contact	—	<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td>○</td></tr></table>	○	⋮	○	○	<table><tr><td>○</td><td></td></tr><tr><td>○</td><td></td></tr></table>	○		○									
○	⋮																			
○	○																			
○																				
○																				
71	Alarm contact + shunt release + double auxiliary contacts	—	<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>	○	○	⋮	○	○				<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>	○	○	⋮	○	○			
○	○	⋮	○																	
○																				
○	○	⋮	○																	
○																				
72	Alarm contact + shunt release + three auxiliary contacts	—	<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>	○	○	⋮	○	○		○		<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>	○	○	⋮	○	○		○	
○	○	⋮	○																	
○		○																		
○	○	⋮	○																	
○		○																		
80	Alarm contact + undervoltage release + single auxiliary contact	—	<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td>○</td></tr></table>	○	⋮	○	○	<table><tr><td>○</td><td>⋮</td></tr><tr><td>○</td><td>○</td></tr></table>	○	⋮	○	○								
○	⋮																			
○	○																			
○	⋮																			
○	○																			
81	Alarm contact + undervoltage release + double auxiliary contacts	—	<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>	○	○	⋮	○	○				<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>	○	○	⋮	○	○			
○	○	⋮	○																	
○																				
○	○	⋮	○																	
○																				
82	Alarm contact + undervoltage release + three auxiliary contacts	—	<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>	○	○	⋮	○	○		○		<table><tr><td>○</td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>	○	○	⋮	○	○		○	
○	○	⋮	○																	
○		○																		
○	○	⋮	○																	
○		○																		
24	Shunt release + single auxiliary contact	—	<table><tr><td></td><td>⋮</td></tr><tr><td>○</td><td>○</td></tr></table>		⋮	○	○	<table><tr><td></td><td>⋮</td></tr><tr><td>○</td><td>○</td></tr></table>		⋮	○	○								
	⋮																			
○	○																			
	⋮																			
○	○																			
25	Shunt release + double auxiliary contacts	—	<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>		○	⋮	○	○				<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>		○	⋮	○	○			
	○	⋮	○																	
○																				
	○	⋮	○																	
○																				
26	Shunt release + three auxiliary contacts	—	<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>		○	⋮	○	○		○		<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>		○	⋮	○	○		○	
	○	⋮	○																	
○		○																		
	○	⋮	○																	
○		○																		
34	Undervoltage release + single auxiliary contact	—	<table><tr><td></td><td>⋮</td></tr><tr><td>○</td><td>○</td></tr></table>		⋮	○	○	<table><tr><td></td><td>⋮</td></tr><tr><td>○</td><td>○</td></tr></table>		⋮	○	○								
	⋮																			
○	○																			
	⋮																			
○	○																			
35	Undervoltage release + double auxiliary contacts	—	<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>		○	⋮	○	○				<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td></td><td></td></tr></table>		○	⋮	○	○			
	○	⋮	○																	
○																				
	○	⋮	○																	
○																				
36	Undervoltage release + three auxiliary contacts	—	<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>		○	⋮	○	○		○		<table><tr><td></td><td>○</td><td>⋮</td><td>○</td></tr><tr><td>○</td><td></td><td>○</td><td></td></tr></table>		○	⋮	○	○		○	
	○	⋮	○																	
○		○																		
	○	⋮	○																	
○		○																		

Main technical parameters							Table 2			
Frame current Inm (A)				160						
Rated current In (A)				16、20、32、40、50、63、80、100、125、160 ；						
Rated voltage Ue (V)				AC230、AC400 (Not applicable to 2P) 、AC690 (Not applicable to 2P)						
Rated impulse withstand voltage Uimp (1s)				8kV						
Rated insulation voltage Ui (V)				800						
Power frequency withstand voltage (1min)				3000V						
Rated ultimate breaking capacity Icu(kA)	Code			S		H		L		
	AC230V (2P、3P、4P)			100		120		150		
	AC400V (3P、4P)			70		100		150		
	AC690V (3P、4P)			8		12		15		
Rated operating breaking capacity Ics(kA)				Ics=100%Icu						
Life	Mechanical life	25000times								
	Electrical life	AC230V、AC400V		18000times						
		AC690V		8000times						
Wiring	Current(A)	16、20	25	32	40、50	63	80	100	125	160
capacity	Sectional area (mm ²)	2.5	4	6	10	16	25	35	50	70

Normal operating environment									
> a) Elevation: ≤2000m.									
> b)Ambient temperature: -25°C~+70°C.									
> c)Class of pollution: 3.									
> d)Endure moist air, salt fog and oil fog.									
> e)Max. gradient: 22.5°.									
> f)In the medium without explosion hazard, and the medium contains no gas and conductive dust that may corrode metal and damage insulation.									
> g)In a place without snow and rain influence.									

Tripping characteristics (Refer to Fig. 1 and 2)

> Tripping characteristic curve in normal environment (The ambient temperature is 40°C), refer to Fig. 1 and 2.

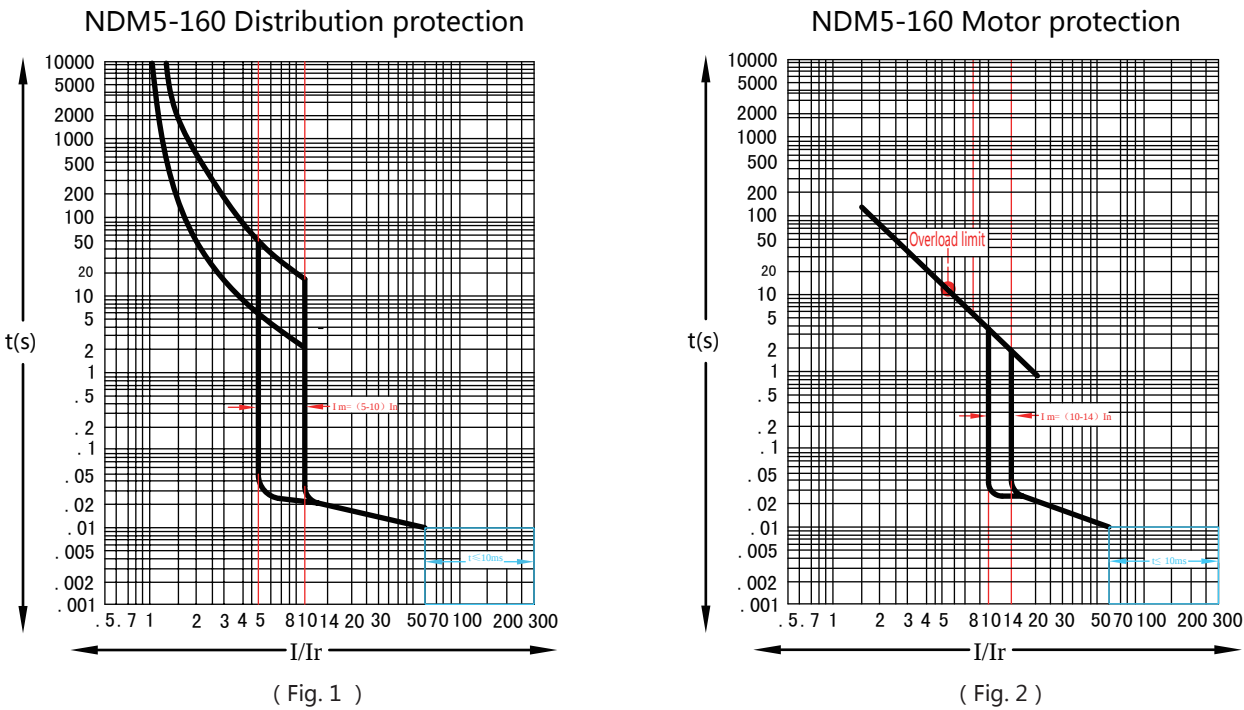


Table 3	
> If ambient temperature fluctuates, there will be small change in tripping characteristics, which shall be corrected (Refer to Table 3)	
Ambient air temperature	Coefficient for temperature correction
-25°C	1.33
-20°C	1.305
-15°C	1.278
-10°C	1.251
-5°C	1.225
0°C	1.2
5°C	1.175
10°C	1.15
15°C	1.125
20°C	1.1
25°C	1.075
30°C	1.05
35°C	1.025
40°C	1.0
45°C	0.975
50°C	0.95
55°C	0.925
60°C	0.9
65°C	0.875
70°C	0.85

Table 4

> When the elevation is more than 2000m at the ambient temperature +40°C, in consideration of insulation characteristic and cooling capacity of air, there will be change in tripping characteristics, which shall be corrected (Refer to Table 4)

Elevation (m)	2000	3000	4000	5000
Power frequency withstand voltage (V)	3000	2700	2400	2100
Average insulation class (V)	1Ui	0.9Ui	0.8Ui	0.7Ui
Max. operating voltage (V)	1Ue	0.9Ue	0.8Ue	0.7Ue
Average operating current (+40°C)	1In	0.96In	0.93In	0.9In

Power consumption and internal resistance (Refer to Table 5)

Table 5


Rated current(A)	Fixed type			
	Internal resistance of each phase (mΩ)			Total power consumption on three poles (W)
	A	B	C	
16	8.86	9.03	8.59	6.77
20	7.21	7.55	7.33	8.83
25	4.26	4.26	4.31	8.01
32	3.14	2.95	2.89	9.19
40	2.54	2.48	2.78	12.48
50	2.23	2.23	2.32	16.95
63	2.05	2.14	2.12	25.04
80	0.97	1.1	0.86	18.75
100	0.57	0.57	0.77	19.1
125	0.57	0.57	0.77	29.84
160	0.37	0.47	0.44	32.76

Internal accessories

Table 6

> Parameters and description of auxiliary contacts (Refer to Table 6)


Accessory	Voltage (V)/Conventional thermal current (Ith)		
Auxiliary contact	AC250V/10A	AC400V/3A	DC220V/0.2A

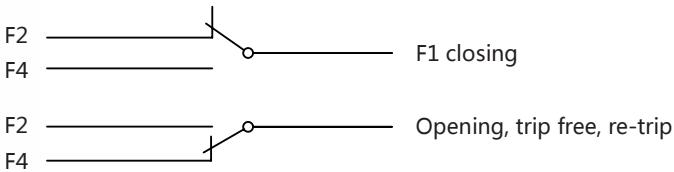

Parameters and description of alarm contact (Refer to Table 7)

Table 7


Accessory	Voltage (V)/Conventional thermal current (Ith)	
Alarm contact	AC250V/10A	DC220V/0.2A

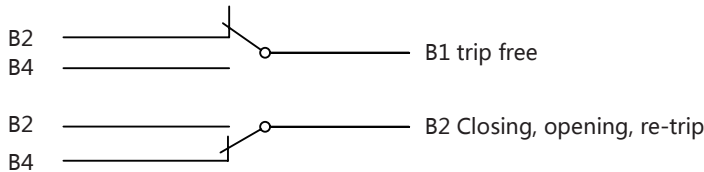

Undervoltage release (Refer to Table 8)

Table 8

> When the supply voltage drops to 35%~70% of rated operating voltage of the undervoltage release, the release can break the circuit breaker reliably; when the supply voltage is less than 35% of the rated operating voltage of the undervoltage release, the release can prevent the circuit breaker from closing; and when the supply voltage is more than 85% of the rated operating voltage of the undervoltage release, the release can guarantee reliable closing of the circuit breaker.




Accessory	Rated operating voltage		
Undervoltage release	AC110V/DC110V	AC230V/DC250V	AC400V

Shunt release (Refer to Table 9)

Table 9

> The shunt release can break the circuit breaker reliably when the applied voltage is between 70%~110% of the rated control supply voltage.



Accessory	Rated control voltage			
Shunt release	AC24V/DC24	AC48V/DC48	AC110V/DC110V	AC230V/DC250V

Connection capacity (Refer to Table 10)


Table 10

Rated current (A)	16、20	25	32	40、50	63	80	100	125	160
Sectional area of Conductor (mm2)	2.5	4	6	10	16	25	35	50	70

Overall and mounting dimension


Overall dimension

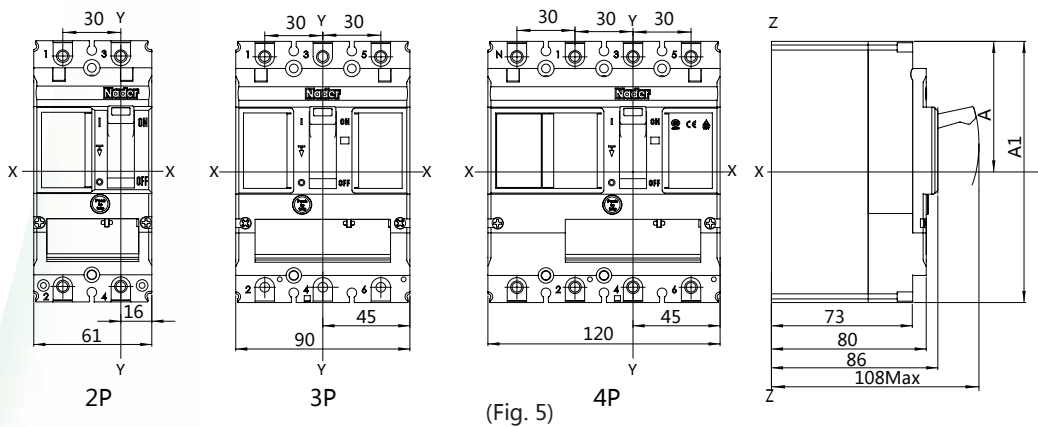Front connection (Refer to Fig. 5)




Note: The dimension of front connection without accessories: A=67.5, A1=135;
The dimension of front bare copper cable connection with accessories: A=77.5, A1=155.

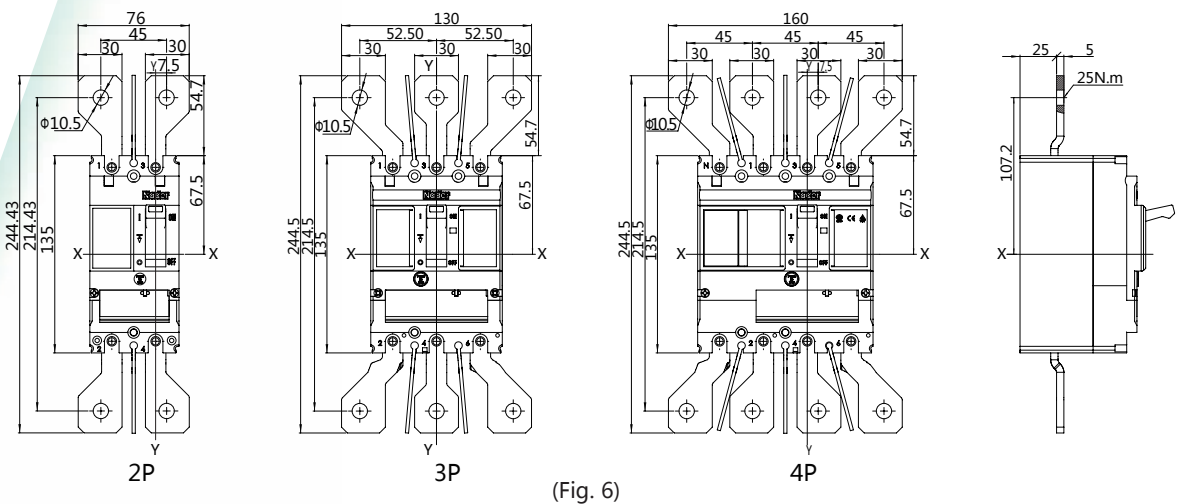Overall dimension of front extension connection (Refer to Fig. 6)




Mounting dimension

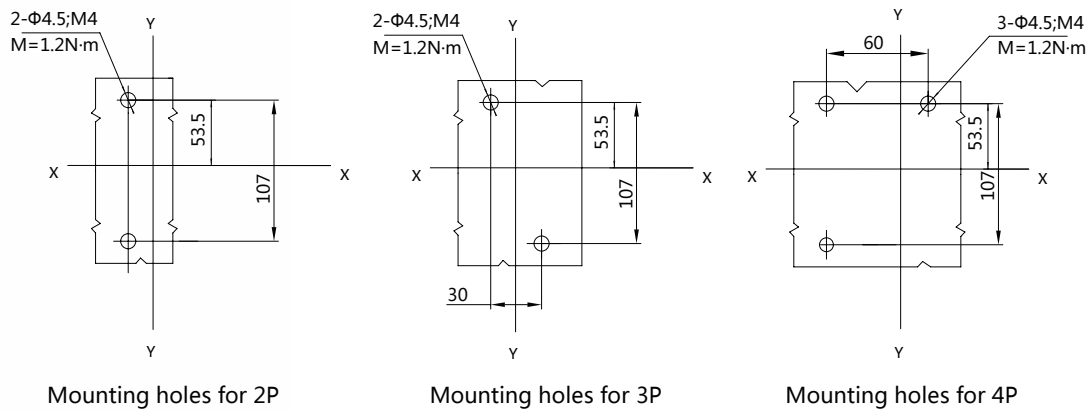Mounting on the baseplate (Refer to Fig. 7)



(Fig. 7)

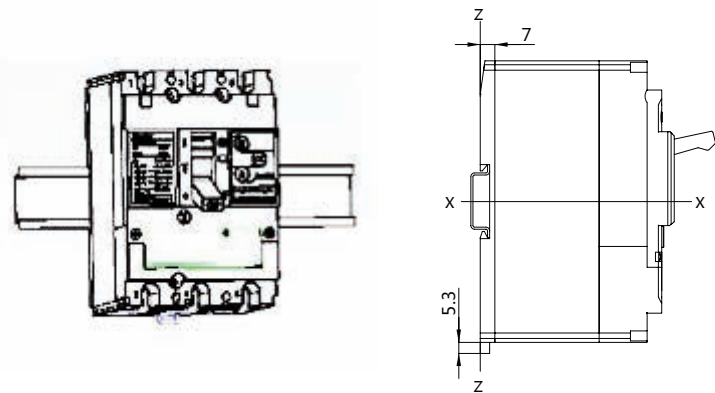
Mounting on the DIN guide rail with the adapter (Refer to Fig. 8)



(Fig. 8)

Mounting modes (Refer to Fig. 9)

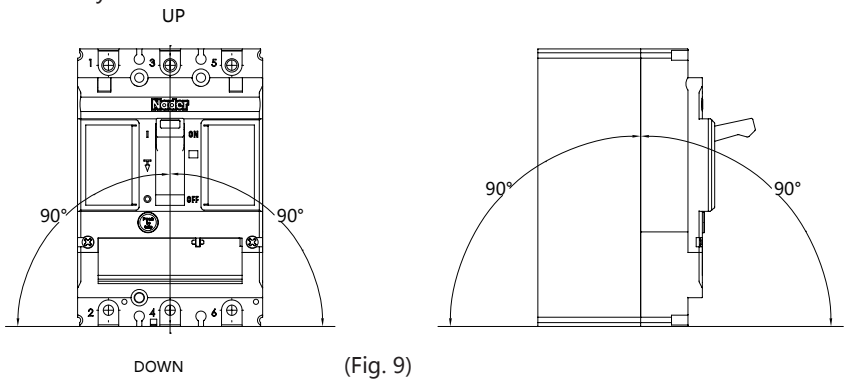Both horizontally or vertically



(Fig. 9)

Package and storage

- > The Min. packing quantity is 1 pc/box, the products packed in box shall be stored in the warehouse where the ambient temperature is 5°C~35°C, the RH is under 80%, and ambient air does not contain any acid, alkaline or other corrosive gas. The storage period under the above mentioned conditions shall be no more than 18 months since the date of production.
- > Storage temperature: -40°C~+70°C.

Accessories and installation

Table 11

No.	Name	Specification	Qty./pc		
			2P	3P	4P
1	Cress recessed small pan head screw	M4×75	2	2	3
2	Flat washer	4	2	2	3
3	Spring washer	4	2	2	3
4	Hexagon nut	M4	2	2	3
5	Interphase insulating barrier	—	2	4	6

Notice

- > a) The performance parameters here are for normal conditions. Any special requirements shall be confirmed officially before readjustment and putting into operation;
- > b) Only the trained or qualified professionals can mount and maintain this circuit breaker, the tripping unit or other accessories;
- > c) Before mounting or dismantling any device, make sure that the power supply has been cut off.

NDM5Z-160 Molded Case Circuit Breaker

Scope of application

- >The NDM5Z-160 series of molded Case Circuit Breakers with the rated insulation voltage of 1200V are applicable to the circuits with the rated operating voltage of DC500V (2P in series), DC750V (3P in series), DC1000V (4P in series), DC1200V (4P in series), and the rated operating current of 16A~160A for electrical energy distribution, at the same time, protection of circuits and power supply devices in case of overload, short circuit, undervoltage (With the UVT) .
- >The isolating function with the relative symbol: . 
- >Standards: IEC60947-2 and GB14048.2.



Model and implication

ND **M** **5** **Z** - **160**   /  /  /     









































1 **2** **3** **4** **5** **6** **7** **8** **9** **10** **11** **12** **13**

No.	Implication	Model
1	Enterprise code "NADER"	ND
2	Molded case circuit breaker	M
3	Design code	5
4	Special code for DC circuit breakers	Z
5	Frame current Inm (A):	160
6	Breaking level code:	S, H, L
7	Rated current In (A):	16, 20, 25, 32, 40, 50, 63, 80, 100, 125, 160
8	Number of poles	(Refer to "Note a")
9	Release code	(Refer to "Note b")
10	Installation modes	(Refer to "Note c")
11	Connection modes	(Refer to "Note d")
12	Operating modes	(Refer to "Note e")
13	Accessories	(Refer to "Table 1")

Note:

- a) Number of poles
> 2: 2 poles; 3: 3 poles; 4: 4 poles;
- b) Release code: TMDC: [Thermal adjustable (0.8-0.9-1.0) In, magnetic fixed 10In, for power distribution];
- c) Installation modes: Fixed: "No code" ; plug-in: "P" ; guide rail: "G" .
- d) Connection modes: Front wiring: "No code" ; front extension wiring: "ES" ; front bare copper cable wiring: "FCu" ; rear screw wiring: "R" .
- e) Operating modes: Direct handle operation: "No code" ; rotary handle operation: "R" ; motor operation: "M" (Note: Not applicable to 2P).

Table 1

Accessory code	Name of accessory	Mounting position		
		2P	3P	4P
00	No	—	—	—
10	Alarm contact			
20	Shunt release			
30	Undervoltage release			
40	Single auxiliary contact	—		
50	Double auxiliary contacts	—		
60	Three auxiliary contacts	—		
12	Alarm contact + shunt release			
13	Alarm contact + undervoltage release			
14	Alarm contact + single auxiliary contact	—		
15	Alarm contact + double auxiliary contacts	—		
16	Alarm contact + three auxiliary contacts	—		
70	Alarm contact + shunt release + single auxiliary contact	—		
71	Alarm contact + shunt release + double auxiliary contacts	—		
72	Alarm contact + shunt release + three auxiliary contact	—		
80	Alarm contact + undervoltage release + single auxiliary contact	—		
81	Alarm contact + undervoltage release + double auxiliary contacts	—		
82	Alarm contact + undervoltage release + three auxiliary contacts	—		
24	Shunt release + single auxiliary contact	—		
25	Shunt release + double auxiliary contacts	—		
26	Shunt release + three auxiliary contacts	—		
34	Undervoltage release + single auxiliary contact	—		
35	Undervoltage release + double auxiliary contacts	—		
36	Undervoltage release + three auxiliary contacts	—		

Main technical parameters							Table 2			
Frame current Inm (A)				160						
Rated current In (A)				16、20、32、40、50、63、80、100、125、160 ；						
Rated voltage Ue (V)				DC : 500(2P)、750(3P)、1000(4P)、1200(4P)						
Rated impulse withstand voltage Uimp (1s)				8kV						
Rated insulation voltage Ui (V)				1200						
Power frequency withstand voltage (1min)				3000V						
Rated ultimate breaking capacity Icu (kA)	Code			S	H			L		
	DC500V (2P in series)			50	85			100		
	DC750V (3P in series)			50	85			100		
	DC1000V (4P in series)			25	35			50		
	DC1200V (4P in series)			无				25		
Rated operating breaking capacity Ics (kA)				Ics=100%Icu						
Life	Mechanical life	25000 times								
	Electrical life	DC500V (2P in series)		5000 times						
		DC750V (3P in series)		5000 times						
		DC1000V (4P in series)		4000 times						
		DC1200V (4P in series)		3000 times						
Wiring capacity	Current (A)	16 、 20	25	32	40 、 50	63	80	100	125	160
	Sectional area (mm2)	2.5	4	6	10	16	25	35	50	70

Normal operating environment									
> Elevation: ≤2000m.									
> Ambient temperature: -25°C~+70°C.									
> Class of pollution: 3.									
> Endure moist air, salt fog and oil fog.									
> Max. gradient: 22.5°.									
> In the medium without explosion hazard, and the medium contains no gas and conductive dust that may corrode metal and damage insulation.									
> In a place without snow and rain influence.									

Tripping characteristics (Refer to Fig. 2)

> Tripping characteristic curve in normal environment (The ambient temperature is 40°C), refer to Fig. 2

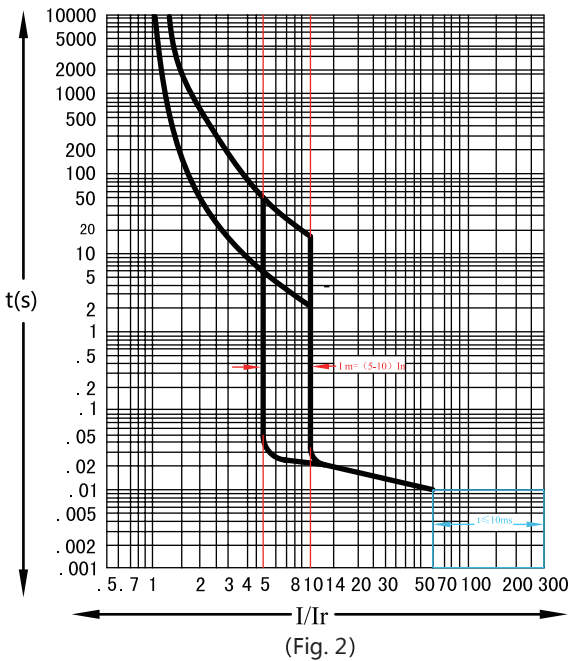


Table 3									
> If ambient temperature fluctuates, there will be small change in tripping characteristics, which shall be corrected (Refer to Table 3)									
Ambient air temperature					Coefficient for temperature correction				
-25°C					1.33				
-20°C					1.305				
-15°C					1.278				
-10°C					1.251				
-5°C					1.225				
0°C					1.2				
5°C					1.175				
10°C					1.15				
15°C					1.125				
20°C					1.1				
25°C					1.075				
30°C					1.05				
35°C					1.025				
40°C					1.0				
45°C					0.975				
50°C					0.95				
55°C					0.925				
60°C					0.9				
65°C					0.875				
70°C					0.85				

Table 4									
> When the elevation is more than 2000m at the ambient temperature +40°C, in consideration of insulation characteristic and cooling capacity of air, there will be change in tripping characteristics, which shall be corrected (Refer to Table 4)									
Elevation (m)	2000	3000	4000	5000					
Power frequency withstand voltage (V)	3000	2700	2400	2100					
Average insulation class (V)	1Ui	0.9Ui	0.8Ui	0.7Ui					
Max. operating voltage (V)	1Ue	0.9Ue	0.8Ue	0.7Ue					
Average operating current (+40°C)	1In	0.96In	0.93In	0.9In					

Power consumption and internal resistance (Refer to Table 5) Table 5

Rated current(A)	Fixed type			
	Internal resistance of each phase (mΩ)			Total power consumption on three poles (W)
	A	B	C	
16	8.86	9.03	8.59	6.77
20	7.21	7.55	7.33	8.83
25	4.26	4.26	4.31	8.01
32	3.14	2.95	2.89	9.19
40	2.54	2.48	2.78	12.48
50	2.23	2.23	2.32	16.95
63	2.05	2.14	2.12	25.04
80	0.97	1.1	0.86	18.75
100	0.57	0.57	0.77	19.1
125	0.57	0.57	0.77	29.84
160	0.37	0.47	0.44	32.76

Internal accessories Table 6

> Parameters and description of auxiliary contacts (Refer to Table 6)

Accessory	Voltage (V)/Conventional thermal current (Ith)		
Auxiliary contact	AC250V/10A	AC400V/3A	DC220V/0.2A


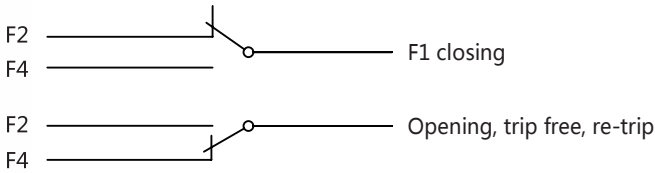


Table 7

> Parameters and description of alarm contacts (Refer to Table 7)


Accessory	Voltage (V)/Convention althermal current (Ith)	
Alarm contact	AC250V/3A	DC220V/0.2A

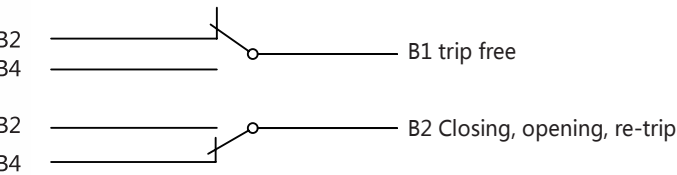

Undervoltage release (Refer to Table 8) Table 8

> When the supply voltage drops to 35%~70% of rated operating voltage of the undervoltage release, the release can break the circuit breaker reliably; when the supply voltage is less than 35% of the rated operating voltage of the undervoltage release, the undervoltage release can prevent the circuit breaker from closing; and when the supply voltage is more than 85% of the rated operating voltage of the undervoltage release, the undervoltage release can guarantee reliable closing of the circuit breaker.


Accessory	Rated operating voltage		
	AC110V/DC110V	AC230V/DC250V	AC400V



Shunt release (Refer to Table 9) Table 9

> The shunt release can break the circuit breaker reliably when the applied voltage is between 70%~110% of the rated control supply voltage.

Accessory	Rated control voltage			
	AC24V/DC24	AC48V/DC48	AC110V/DC110V	AC230V/DC250V



Connection

Connection modes

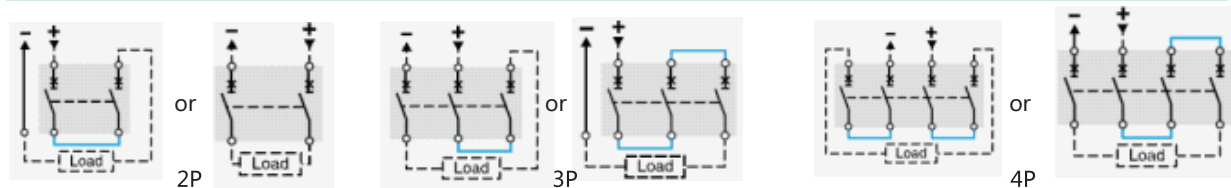


Table 10


> Connection capacity

Rated current (A)	16、 20	25	32	40、 50	63	80	100	125	160
Sectional area of Conductor (mm²)	2.5	4	6	10	16	25	35	50	70

Overall and mounting dimension


Overall dimension

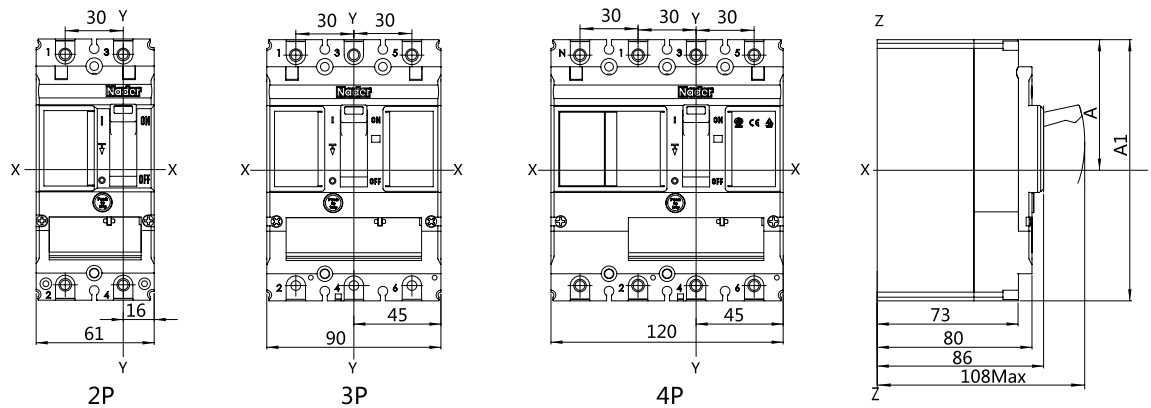Front connection (Refer to Fig. 3)



Note: The dimension of front connection without accessories: A=67.5, A1=135;
The dimension of front bare copper cable connection with accessories: A=77.5, A1=155.

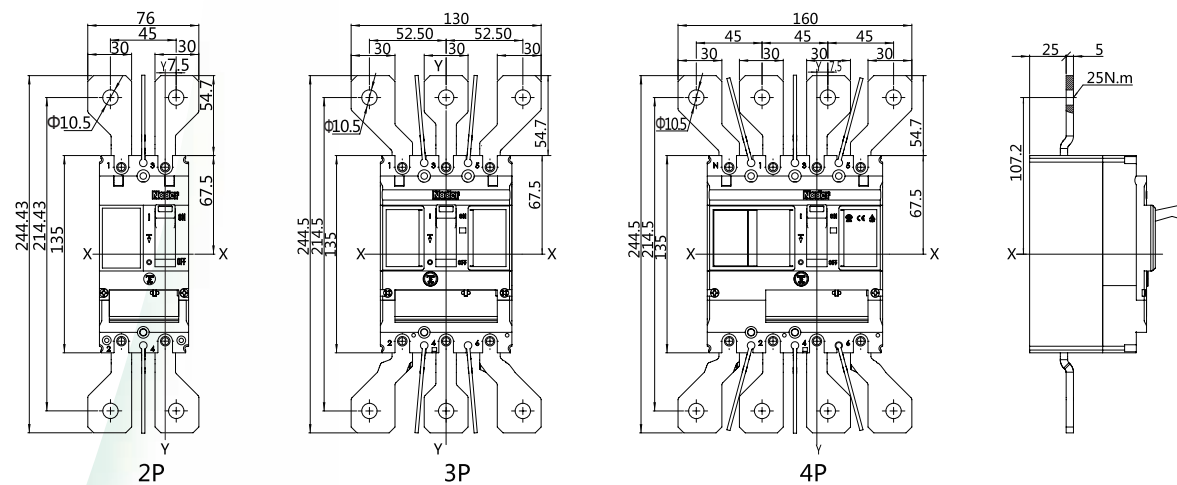
Overall dimension of front extension connection (Refer to Fig. 4)



(Fig. 4)


Mounting dimension

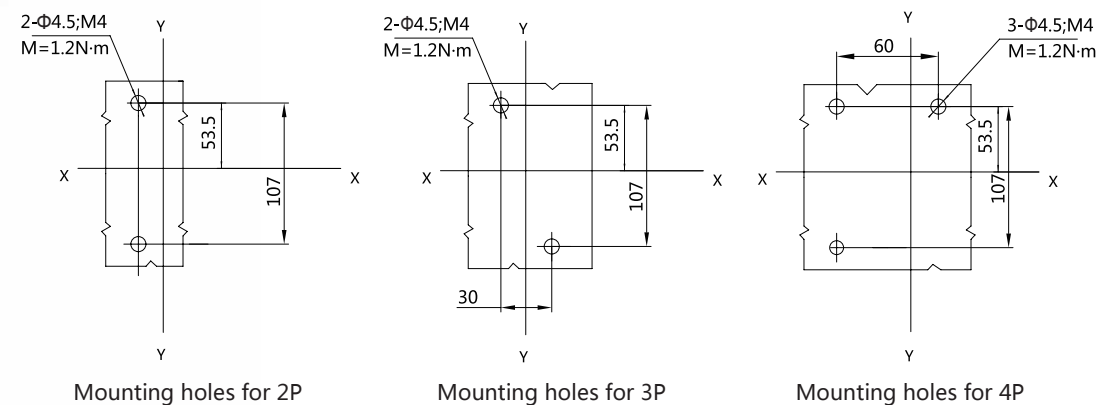Mounting on the baseplate (Refer to Fig. 5)



(Fig. 5)

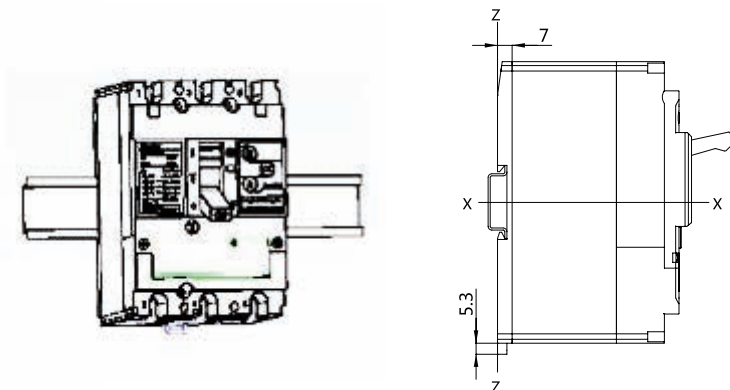
Mounting on the DIN guide rail with the adapter (Refer to Fig. 6)



(Fig. 6)

Mounting modes (Refer to Fig. 7)

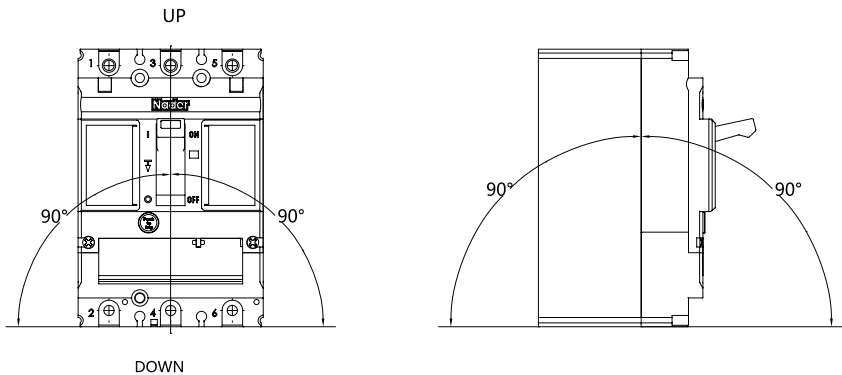Both horizontally or vertically



(Fig. 7)

Package and storage

- > The Min. packing quantity is 1 pc/box, the products packed in box shall be stored in the warehouse where the ambient temperature is 5°C~35°C, the RH is under 80%, and ambient air does not contain any acid, alkaline or other corrosive gas. The storage period under the above mentioned conditions shall be no more than 18 months since the date of production.
- > Storage temperature: -40°C~+70°C.

Accessories and installation (Refer to Table 11)

Table 11


No.	Name	Specification	Qty./pc		
			2P	3P	4P
1	Cress recessed small pan head screw	M4×75	2	2	3
2	Flat washer	4	2	2	3
3	Spring washer	4	2	2	3
4	Hexagon nut	M4	2	2	3
5	Interphase insulating barrier	—	2	3	4
6	Short circuit bar	—	1	2	2

Notice

- > The performance parameters here are for normal conditions. Any special requirements shall be confirmed officially before readjustment and putting into operation;
- > Only the trained or qualified professionals can mount and maintain this circuit breaker, the tripping unit or other accessories;
- > Before mounting or dismounting any device, make sure that the power supply has been cut off.

NDM5E-160 molded case circuit breakers

Scope of application

- > The NDM5E-160 series of molded case circuit breakers with the rated insulation voltage of 800V is applicable to the AC 50Hz or 60Hz circuits with the rated operating voltage of AC400V and AC690V, and rated operating current of 160A for electrical energy distribution, which have the functions for overload long time delay inverse time lag protection, short circuit short-time delay inverse time lag protection, short circuit instantaneous protection, overload and alarm, alarm without tripping, communication and so on to protect the line and the power supply equipment.
- > The isolating function with the relative symbol: 
- > Standards: IEC60947-2 and GB14048.2.



Model and implication

ND	M	5	E	-	160			/		/		/				
1	2	3	4		5	6	7		8		9		10	11	12	13

No.	Implication	Model
1	Enterprise code "NADER"	ND
2	Molded case circuit breaker	M
3	Design code	5
4	Special code for electronic circuit breakers	E
5	Frame current Inm (A):	160
6	Breaking level code:	S, H, L
7	Rated current In (A):	160
8	Number of poles	(Refer to "Note a")
9	Release code	(Refer to "Note b")
10	Installation modes	(Refer to "Note c")
11	Connection modes	(Refer to "Note d")
12	Operating modes	(Refer to "Note e")
13	Accessories	(Refer to "Table 1")

Note:

- a) Number of poles
- > 3: 3 poles;
 - > 4: 4 poles;
 - > 4A: There is no overcurrent protection on Pole N, and Pole N is always on;
 - > 4B: There is no overcurrent protection on Pole N, and Pole N opens and closes with the other three poles (Pole N closes at first, and opens at last);
 - > 4C: There is overcurrent protection on Pole N, and Pole N is opening with the other three poles (Pole N closes at first, and opens at last);
 - > 4D: There is overcurrent protection on Pole N, and Pole N is always on.

b) Release code

An ETB (Electronic release) has the following functions:

Overload long time delay:

- > 1) Setting current Ir= (0.4-0.5-0.6-0.7-0.8-0.9-1-OFF) In;
- > 2) Setting time Tr = (10-15-30-45-60-80-100-120-OFF) s;

Short circuit short time delay:

- > 1) Setting current Is= (2-3-4-5-6-7-8-9-10-OFF) Ir;
- > 2) Setting time: When the current is (1-1.5) Is, the short time delay Ts is inverse time lag;
- > When the current > 1.5Is, the short time delay Ts = (0.1-0.2-0.3-0.4) s.

Short circuit instantaneous:

- > 1) Setting current Ii=Is= (3-4-5-6-7-8-9-10-12-14-OFF) Ir;
- > 2) Setting time < 50ms.

Phase N protection:

- > (ON-OFF); the setting current of Phase N under protection is Irn = 0.5Ir or Irn = 1Ir, optional.

Pre-alarm:

- > NDM5E-160/3P: External (0.9-1) Ir, adjustable;
- > NDM5E-160/4P: Internal 0.9Ir, not adjustable;

Alarm without tripping:

- > Set long time delay to OFF;
- > ETC (Intelligent release): The functions of the electronic release + communication.

c) Installation modes: Fixed: "No code" ; plug-in: "P" ; guide rail: "G" .

d) Connection modes: Front wiring: "No code" ; front extension wiring: "ES" ; front bare copper cable wiring: "FCu" ; rear screw wiring: "R" .

e) Operating modes: Direct handle operation: "No code" ; rotary handle operation: "R" ; motor operation: "M" .

Table 1

Accessory code	Name of accessory	Mounting position	
		3P	4P
00	No		
10	Alarm contact		
20	Shunt release		
30	Undervoltage release		
40	Single auxiliary contact		
50	Double auxiliary contacts		
60	Three auxiliary contacts		
12	Alarm contact + shunt release		
13	Alarm contact + undervoltage release		
14	Alarm contact + single auxiliary contact		

15	Alarm contact + double auxiliary contacts		
16	Alarm contact + three auxiliary contacts		
70	Alarm contact + shunt release + single auxiliary contact		
71	Alarm contact + shunt release + double auxiliary contacts		
72	Alarm contact + shunt release + three auxiliary contacts		
80	Alarm contact + undervoltage release + single auxiliary contact		
81	Alarm contact + undervoltage release + double auxiliary contacts		
82	Alarm contact + undervoltage release + three auxiliary contacts		
24	Shunt release + single auxiliary contact		
25	Shunt release + double auxiliary contacts		
26	Shunt release + three auxiliary contacts		
34	Undervoltage release + single auxiliary contact		
35	Undervoltage release + double auxiliary contacts		
36	Undervoltage release + three auxiliary contacts		


Main technical parameters							Table 2				
Frame current Inm (A)				160							
Rated current In (A)				160							
Rated voltage Ue (V)				AC400、AC690							
Rated impulse withstand voltage Uimp (1s)				8kV							
Rated insulation voltage Ui (V)				800							
Power frequency withstand voltage (1min)				3000V							
Rated ultimate breaking capacity	Code			S		H		L			
	AC400V			70		100		150			
	AC690V			8		12		15			
Rated operating breaking capacity Ics (kA)				Ics=100%Icu							
Life	Mechanical life		25000times								
	Electrical life	AC400V		18000times							
		AC690V		8000times							
Wiring	Current(A)	16、20	25	32	40、50	63	80	100	125	160	
capacity	Sectional area (mm ²)	2.5	4	6	10	16	25	35	50	70	

Normal operating environment

- > a) Elevation: $\leq 2000m$.
- > b) Ambient temperature: $-25^{\circ}C \sim +70^{\circ}C$.
- > c) Class of pollution: 3.
- > d) Endure moist air, salt fog and oil fog.
- > e) Max. gradient: 22.5° .
- > f) In the medium without explosion hazard, and the medium that contains no gas and conductive dust that may corrode metal and damage insulation.
- > In a place without snow and rain influence.

Tripping characteristics

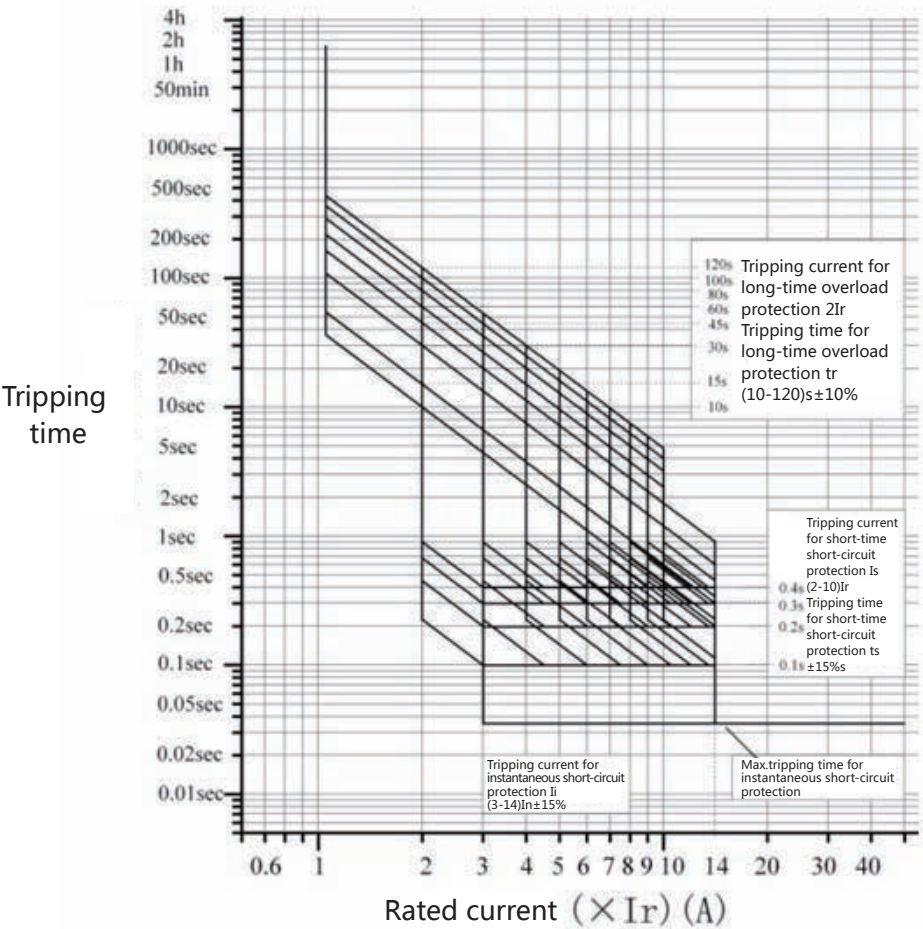- > Tripping characteristic curve in normal environment (The ambient temperature is $-25^{\circ}C \sim +40^{\circ}C$) (refer to Fig. 2)



(Fig. 2)

Table 3

> If ambient temperature fluctuates, there will be small change in tripping characteristics, which shall be corrected

Ambient air temperature	Coefficient for temperature correction
40°C	1.0
45°C	0.975
50°C	0.95
55°C	0.925
60°C	0.9
65°C	0.875
70°C	0.85

Table 4

> When the elevation is more than 2000m at the ambient temperature +40°C, in consideration of air insulation characteristic and cooling capacity, there will be change in tripping characteristics, which shall be corrected (Refer to Table 4)

Elevation (m)	2000	3000	4000	5000
Power frequency withstand voltage (V)	3000	2700	2400	2100
Average insulation class (V)	1Ui	0.9Ui	0.8Ui	0.7Ui
Max. operating voltage (V)	1Ue	0.9Ue	0.8Ue	0.7Ue
Average operating current (+40°C)	1In	0.96In	0.93In	0.9In

Power consumption and internal resistance

Table 5


Rated current(A)	Fixed type			
	Internal resistance of each phase (mΩ)			Total power consumption on three poles (W)
	A	B	C	
160	0.34	0.43	0.4	30

Internal accessories

Table 6

> Parameters and description of auxiliary contacts


Accessory	Voltage (V)/Conventional thermal current (Ith)		
Auxiliary contact	AC250V/10A	AC400V/3A	DC220V/0.2A

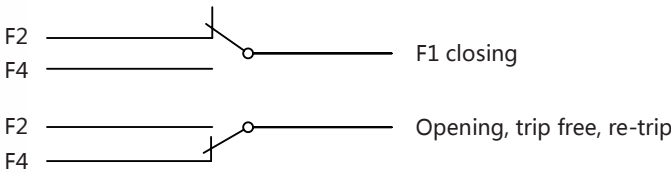

Parameters and description of alarm contacts

Table 7


Accessory	Voltage (V)/Conventional thermal current (Ith)	
Alarm contact	AC250V/3A	DC220V/0.2A

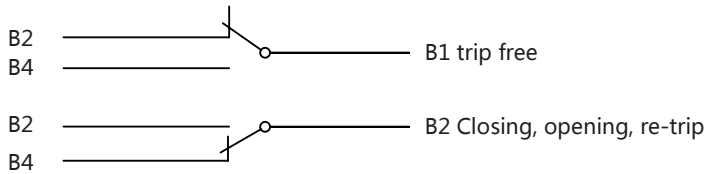

Undervoltage release

Table 8

> When the supply voltage drops to 35%~70% of rated operating voltage of the undervoltage release, the release can break the circuit breaker reliably; when the supply voltage is less than 35% of the rated operating voltage of the undervoltage release, the undervoltage release can prevent the circuit breaker from closing; and when the supply voltage is more than 85% of the rated operating voltage of the undervoltage release, the undervoltage release can guarantee reliable closing of the circuit breaker.




Accessory	Rated operating voltage		
Undervoltage release	AC110V/DC110V	AC230V/DC250V	AC400V

Shunt release

Table 9

> The shunt release can break the circuit breaker reliably when the applied voltage is between 70%~110% of the rated control supply voltage.



Accessory	Rated control voltage			
Shunt release	AC24V/DC24	AC48V/DC48	AC110V/DC110V	AC230V/DC250V

Connection capacity


Table 10

Rated current (A)	16、 20	25	32	40、 50	63	80	100	125	160
Sectional area of Conductor (mm²)	2.5	4	6	10	16	25	35	50	70

Overall and mounting dimension


Overall dimension

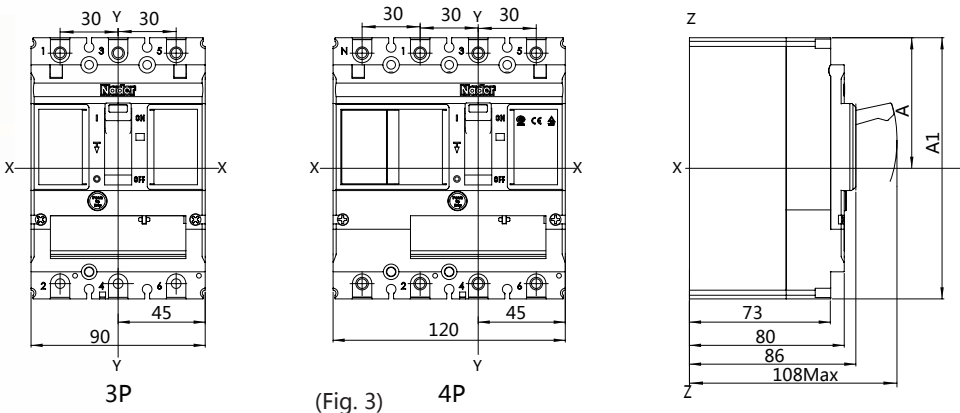Overall dimension of Front connection




Note: The dimension of front connection without accessories: A=67.5, A1=135;
The dimension of front bare copper cable connection with accessories: A=77.5, A1=155.

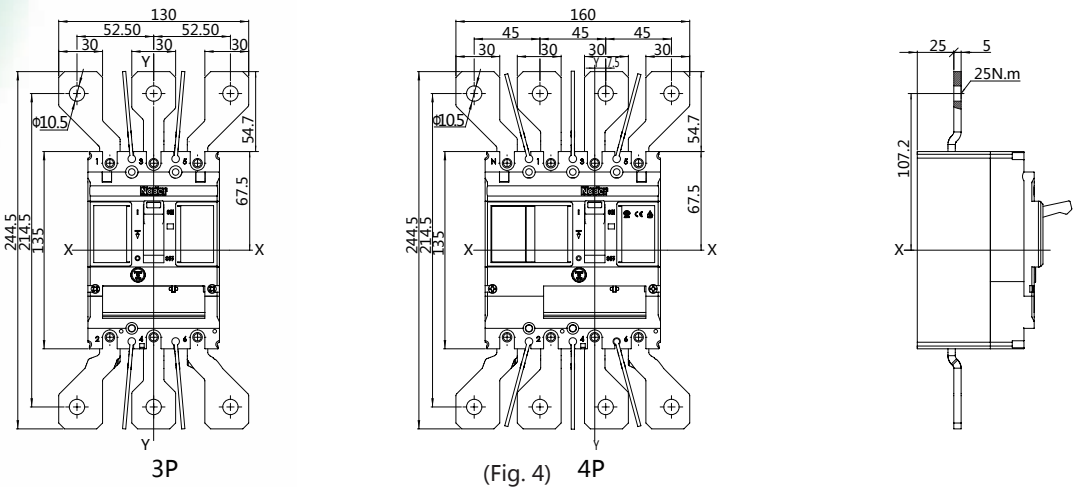Overall dimension of front extension connection (Refer to Fig. 4)




Mounting dimension

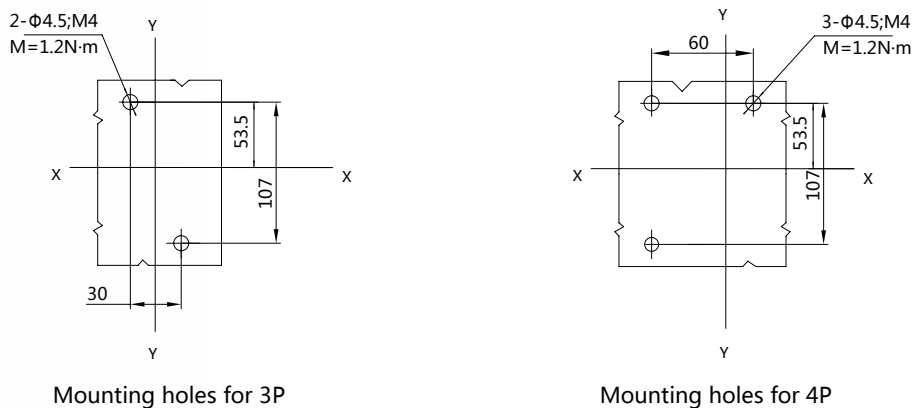Mounting on the baseplate (Refer to Fig. 5)



(Fig. 5)

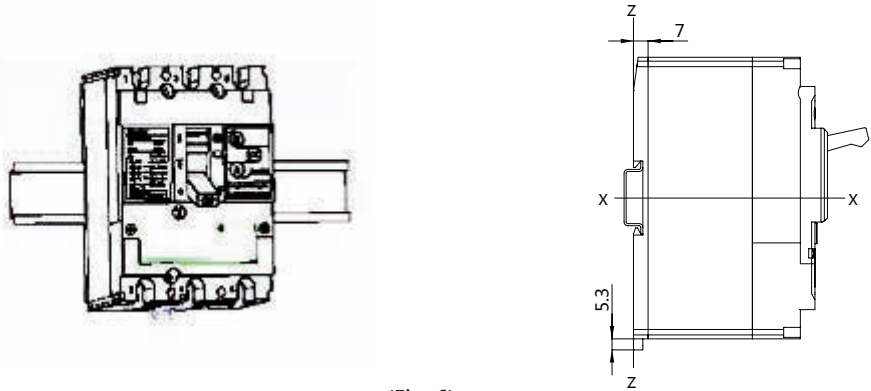
Mounting on the DIN guide rail with the adapter (Refer to Fig. 6)



(Fig. 6)

Mounting modes (Refer to Fig. 7)

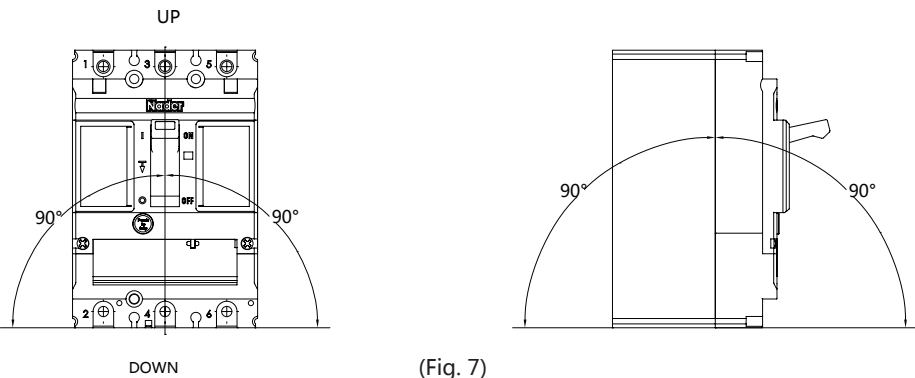Both horizontally or vertically



(Fig. 7)

Package and storage

- > The Min. packing quantity is 1 pc/box, the products packed in box shall be stored in the warehouse where the ambient temperature is 5°C~35°C, the RH is under 80%, and ambient air does not contain any acid, alkaline or other corrosive gas. The storage period under the above mentioned conditions shall be no more than 18 months since the date of production.
- > Storage temperature: -40°C~+70°C.

Accessories and installation (Refer to Table 11)

Table 11

No.	Name	Specification	Qty./pc	
			2P	4P
1	Cress recessed small pan head screw	M4×75	2	3
2	Flat washer	4	2	3
3	Spring washer	4	2	3
4	Hexagon nut	M4	2	3
5	Interphase insulating barrier	—	4	6

Notice

- > a) The performance parameters here are for normal conditions. Any special requirements shall be confirmed officially before readjustment and putting into operation;
- > b) Only the trained or qualified professionals can mount and maintain this circuit breaker, the tripping unit or other accessories;
- > c) Before mounting or dismounting any device, make sure that the power supply has been cut off.